


NOTES:
 1. DUE TO OUR CONTINUOUS IMPROVEMENT PROGRAM, ALL MODELS AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

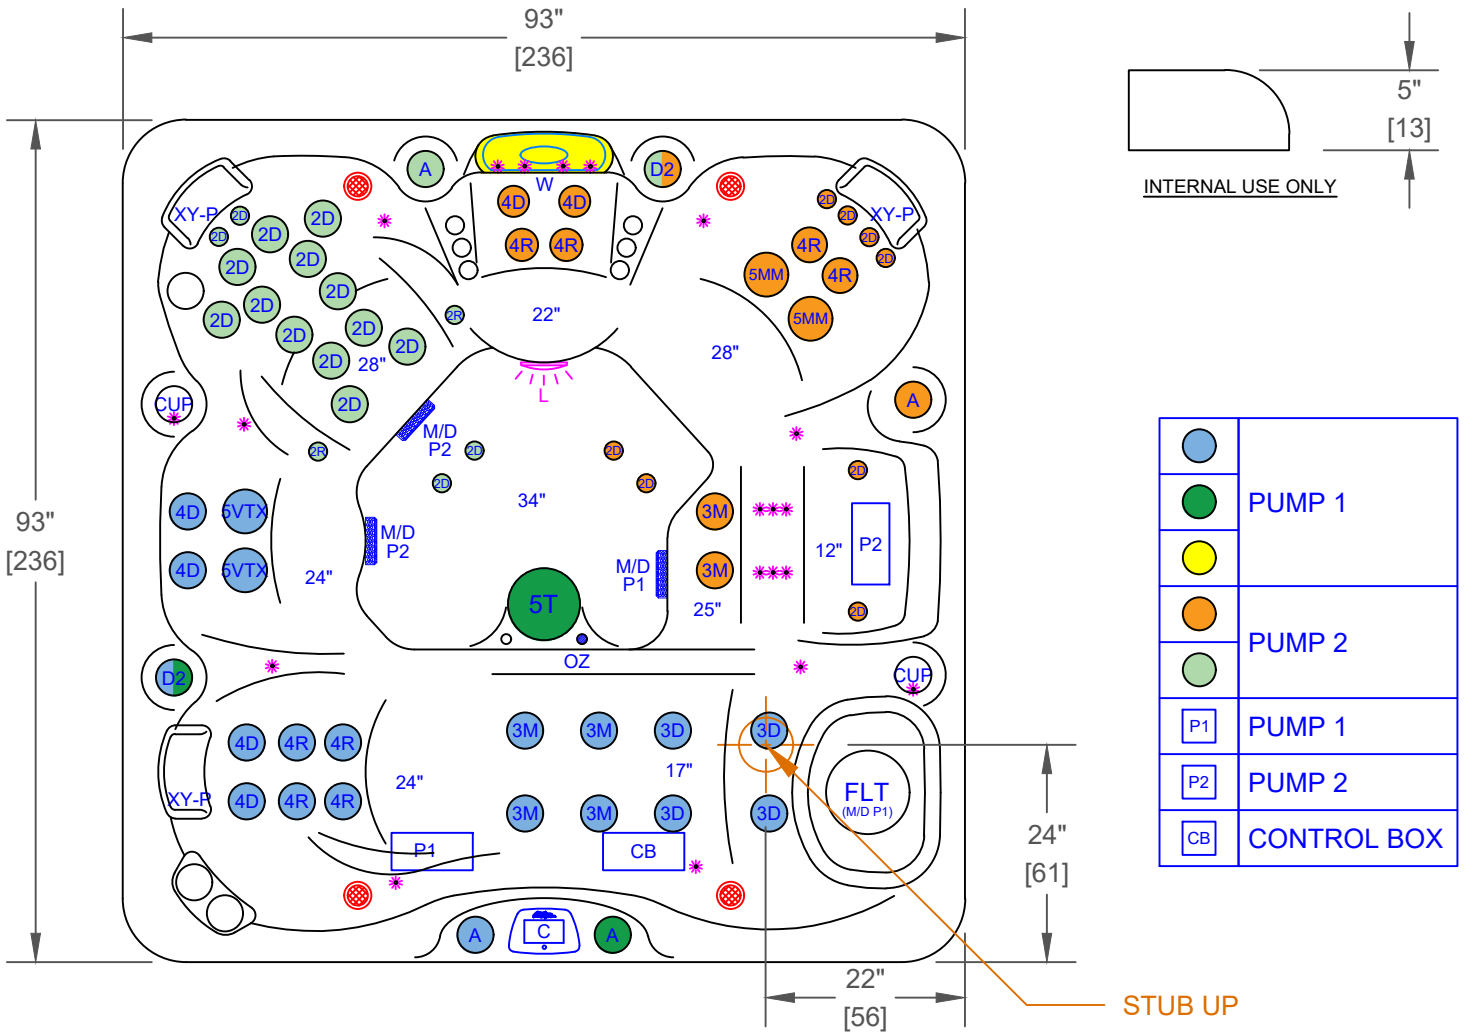

EC-855L - LEGEND

SYMB.	DESCRIPTION	PART NUMBER	QTY.
2D	2" CLUSTER STORM DIRECTIONAL VELOCITY	PLUCS2441009S-CDCL	24
2R	2" CLUSTER STORM TWIN VELOCITY	PLUCS2441029S-CDCL	2
3D	3" MINI STORM DIRECTIONAL VELOCITY	PLUCS2442009SS-CDCL	4
3M	3" MINI STORM MESSAGE DIRECTIONAL VELOCITY	PLUCS2442059S-CDCL	6
4D	4" POLY STORM DIRECTIONAL VELOCITY	PLUCS2443009SS-CDCL	6
4R	4" POLY STORM ROTO VELOCITY	PLUCS2443029SS-CDCL	8
5VTX	5" POWER STORM TRI DIRECTIONAL VELOCITY	PLUCS2444019S-CDCL	2
5MM	5" POWER STORM MULTI MESSAGE VELOCITY	PLUCS2444059S-CDCL	2
5T	5" ADJUSTABLE WHIRLPOOL VELOCITY WITH VALVE	PLUCS2394009S-CDCL	1
D2	VELOCITY 2" WATER DIVERTER VALVE	PLUCS6053309-CDCL	2
A	VELOCITY AIR CONTROL VALVE	PLUCS6603709-CDCL	4
W	LED WATERFALL		1
FLT	75 SQ. FT. BIO-CLEAN FILTER WITH ULTRAWEAR		1
M/D	MAIN DRAIN	PLU644-5219-CDCL V	3
XY-P	TEXTURED Y-PILLOW		4
C	CAL SPAS TOUCH 2		1
OZ	PURE SILK OZONATOR WITH MAZZIE INJECTOR AND MIXING CHAMBER		1
L	5" MULTI COLORED LED LIGHT		1
*	PERIMETER LED LIGHTING		1
-	WIFI - CAL CONNECT		1
-	PURE CURE UV PURIFICATION SYSTEM		1
P1, P2	HIGH PERFORMANCE PUMP 6.0 BHP		2
CB	CONTROL BOX WHISPER HOT™ HEATING SYSTEM		1
CUP	LED CUP HOLDER		2

OPTIONS

SYMB.	DESCRIPTION	OPTION NUMBER
24/7	24/7 FILTRATION SYSTEM	OPT25-112C
XL	XL HEATER	OPT25-XLH
-	ABS MOLDED BOTTOM TRAY	OPT25-990-8
⊗	FREEDOM SOUND SYSTEM BLUETOOTH, POWERED SUBWOOFER AND 4X SPEAKERS	OPT25-FS43
-	THERMO-GUARD FULL FOAM	OPT25-900

SPECIFICATIONS		TITLE	JET LAYOUT - STD	
DIMENSION (in)	93"x93"x40-1/2"	LINE	ESCAPE	
DIMENSION (cm)	236x236x100	MODEL	2025 SPA LINE AVALON	
DRY WEIGHT	900 LBS [408 Kg]	NUM	EC-855L	
FILLED WEIGHT	4650 LBS [2109 Kg]	DWG NO.	CS002630	REV A
WATER CAP.	450 GAL [1703 L]	SCALE	NTS	SHEET 1 OF 1